



RECHARGEABLE FLOODLIGHT 10W COB LED LI-ION COLOUR MATCH CRI-95

MODEL NO: **LED065**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions

1. SAFETY

1.1. GENERAL

IMPORTANT: Ensure that the lamp is fully charged before initial use.

- × **DO NOT** turn the lamp on when it is being charged.
- × **DO NOT** shine directly into your, another person's or an animal's eyes.
- × **DO NOT** allow children to use the lamp.
- × **DO NOT** leave battery in a discharged state. Recharge battery immediately.
- ✓ Recharge the battery at least once every six months of non-use.

1.2. ELECTRICAL SAFETY FOR USE OF CHARGER

- WARNING!** Use only the supplied charger for connecting the lamp to the power supply.
- WARNING!** It is the user's responsibility to read, understand and comply with the following instructions:
IMPORTANT: Ensure the risk of electric shock is minimised by the installation of appropriate safety devices e.g. RCD. If the lamp is used in the course of business duties, it must be maintained in a safe condition and routinely PAT (Portable Appliance Test) tested.
- ✓ Ensure that you inspect the charger plug, cable and connections for wear and damage to ensure items are safe before connecting to the mains power supply. If worn or damaged **DO NOT** use.
- WARNING! DO NOT** use any other type of charger with this product, other than the supplied mains or USB cable. Failure to observe this warning could result in injury and or fire. The use of any other type of charger will invalidate the warranty.
- × **DO NOT** dismantle, there are no user serviceable components.
- × **DO NOT** allow the charger to become wet. Do not use in wet or damp conditions. For indoor use only.
- × **DO NOT** pull the charger plug from the mains socket by the lead.

1.3. BATTERY SAFETY

- × **DO NOT** expose to temperatures above 60°C (140°F).
- ✓ Replace the battery pack with genuine Sealey replacement product only.
- ✓ If in doubt about electrical safety, contact a qualified electrician.

2. INTRODUCTION

Rechargeable floodlight with super bright COB LED which gives an even and constant spread of light. Produces a light with a CRI (Colour Rendering Index) of 95, which gives a daylight effect. Ideal for detecting swirls and differences in paint colour when touching up areas of bodywork. Two settings allow for low or full brightness to suit task. Features a 180° adjustable stand.

3. SPECIFICATION

Model No: **LED065**
 Battery: 11.1V 2.2Ah Li-ion
 Lumen Output (High/Low): 900lm/400lm
 Operating Time (High/Low): 3hr/6hr
 Charging Time: 3hr
 IP Rating: IP65
 CRI Rating: 95
 LED Qty: 1 COB
 Power: 10W
 Nett Weight: 0.84kg

4. CHARGING

- 4.1. **IMPORTANT:** The battery fitted to this lamp is considered to be a consumable item and its ability to accept charge will reduce over time. The warranty against mechanical and electrical defect is for a period of one year, this does not cover fair wear and tear. If the battery is not properly charged before first use, or regularly conditioned, its capacity will diminish. Under these circumstances the battery will not be replaced, even if it is less than one year old.





- 4.2. Connect the charger into the charge socket on the lamp (fig.1). Plug into power supply and turn on, the green charge LEDs on the lamp will light as the battery becomes charged. When fully charged all three will be lit.
- 4.3. When the battery has fully charged (approx 3hrs), disconnect from mains supply.
- 4.4. During usage, when the battery is low the green lights will go out one at a time. When this happens switch off the lamp and re-charge.
NOTE: The Lithium battery does not suffer from memory effect and once fully charged may be stored for up to six months without another charge.

5. OPERATION

- 5.1. Position the floodlight in the area that requires illumination.
- 5.2. This LED floodlight develops minimal heat and is not subject to the same restrictions that apply to halogen lamps that become too hot to touch. It is however, recommended that the floodlight should not be placed in cramped or restrictive situations and recommend the following minimum distances between the light and any surface/object.
- 500mm minimum between the top of the light and any overhead surface, or objects.
 - 200mm between sides of light and end or side walls, surfaces or objects.
 - 1 metre minimum between the front of the light and any object to be illuminated.
- 5.3. Press the switch on the back of the light to turn on 50% illumination, press again for 100% illumination, press again to switch off (fig.1).
- 5.4. Ensure the light is disconnected from the mains power supply when not in use.
- 5.5. Ensure that the unit is cool and dry and is stored in a cool, dry, childproof area.

6. MAINTENANCE

- 6.1. Clean the casing externally (**not the glass**) with a moist cloth.
 x **DO NOT** use solvents or abrasives.
- 6.2. If necessary clean the glass with alcohol and a soft cloth.

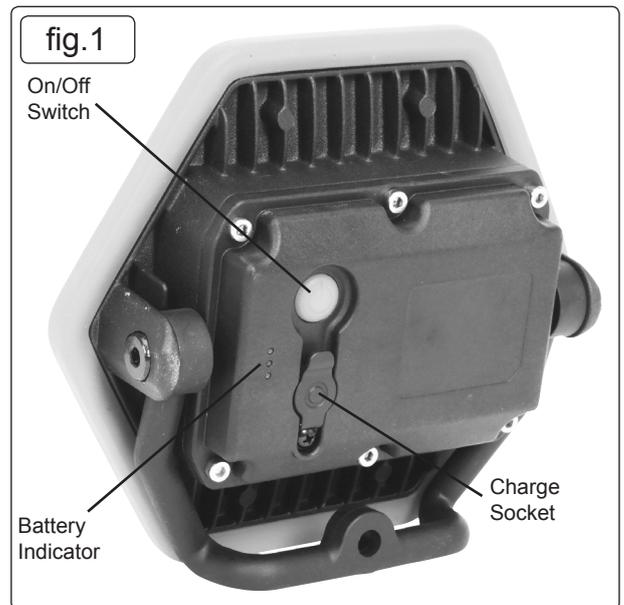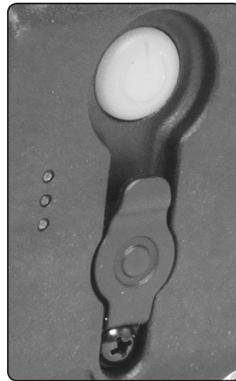

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



BATTERY REMOVAL

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk