

# SEALEY

## 360° 15W & 3W SMD LED RECHARGEABLE INSPECTION LIGHTS

MODEL NO: **LED3606R, LED3606G**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

### 1. SAFETY

#### 1.1. GENERAL

- ✓ Ensure the light is fully charged before initial use.
- ✗ **DO NOT** turn the light on when it is being charged.
- ✗ **DO NOT** shine directly into your, other persons' or animals' eyes.
- ✗ **DO NOT** allow children to use the light.
- ✗ **DO NOT** handle or move the light whilst it is being charged.
- ✗ **DO NOT** use the light if you suspect that the battery or the light casing is damaged.
- ✗ **DO NOT LEAVE BATTERY IN A DISCHARGED STATE, RECHARGE BATTERY IMMEDIATELY. BEFORE STORAGE, FULLY RECHARGE THE BATTERY, SUBSEQUENTLY RECHARGE THE BATTERY AT LEAST ONCE EVERY SIX MONTHS OF NON-USE.**

#### 1.2. BATTERY SAFETY

- **WARNING:** To reduce the risk of burns or fire:
    - ✗ **DO NOT** Attempt to open, dismantle, modify or service the battery pack.
    - ✗ **DO NOT** Crush, puncture, short external contacts or dispose of in fire or water.
    - ✗ **DO NOT** Expose to temperatures above 60°C (140°).
  - ✓ Replace only with the battery pack designated for this product.
  - ✓ Recycle or dispose of used battery as stipulated by local regulation.
- If the electrolyte in the cells gets on your skin, wash thoroughly with soap and water. If it gets in your eyes, rinse thoroughly with cool water and seek immediate medical attention.

### 2. INTRODUCTION

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. 15W SMD LED with magnified lens providing up to 1000 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. Two high quality 3.7V 2.6Ah lithium-ion batteries in parallel for up to 15 hours run time. Micro USB charging port. Supplied with USB cable.

### 3. SPECIFICATION

Model No:	<b>LED3606 Red, Green</b>
Battery:	3.7V 2.6Ah Li-ion (x2)
Charging Time:	7hr
IP Rating:	IP54
LED Type:	15W + 3W SMD
Lumen Output:	Side(High/Low)/Top - (1000/300)/150lm
Maximum Length:	276mm
Minimum Length:	256mm
Operating Time:	Side(High/Low)/Top - (3/12)/15hr

### 4. OPERATION

#### 4.1. CHARGING

- 4.1.1. To charge the light: insert the micro USB plug on the USB cable into the charging port on the back of the light (fig.1).
- 4.1.2. Plug the other end of the USB cable into a 5V USB outlet.
- 4.1.3. The charge indicator lights (fig.1) will light in sequence to show the current level of charge, each charge level being shown by a flashing green before becoming solid.

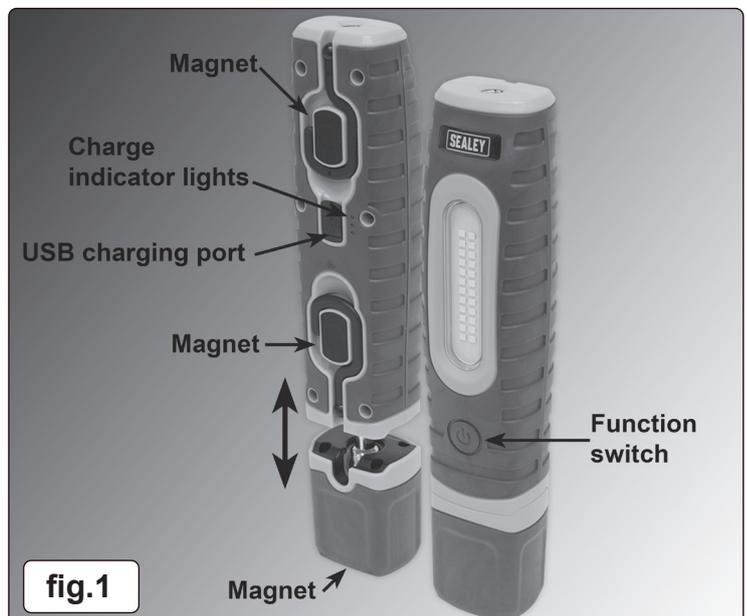


fig.1

4.1.4. Three solid green lights denote a full charge, at which point the light should be disconnected from the power supply.

#### 4.2. USE OF LIGHT

□ **Warning:** Ensure that the lenses are not pointing in a dangerous direction before switching on.

4.2.1. To switch the light on, press the function switch (fig.1) to select the required function:

1st push: Top light.

2nd push: Front light, low output.

3rd push: Front light, high output.

4th push: Off.

4.2.2. When the light is switched on, the charge level will be shown by the number of green charge lights illuminated, three being a full charge.

4.2.3. If only one green light is showing, the light requires recharging.

4.2.4. To employ the 360° function, pull the base downward to release the ball joint. The light can then be positioned in any attitude relative to the base. Alternatively the back magnets or 360° hooks may be used.

#### BATTERY REMOVAL



Remove the 6 screws on the back of the lamp. Remove the back casing and disconnect the wiring from the circuit board. Remove the battery mounting screws. Dispose of according to local government guidelines.

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd Batteries Producer Registration Number (BPRN) is BPRN00705.



#### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE



#### WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No Liability is accepted for incorrect use of this product.

**WARRANTY:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk