



3 LEVEL COMPOSITE WORKSHOP TROLLEY WITH PARTS STORAGE & WASTE DISPOSAL BINS

MODEL NO: CX315

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

1. SAFETY

1.1. GENERAL SAFETY

- WARNING!** The warnings, cautions and instructions in this manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be applied by the operator. Ensure a safe working space of at least a metre exists around the assembling the unit.
- ✓ Use recommended parts only. Unauthorised parts may be dangerous and will invalidate the warranty.
- ✓ Use the trolley only on flat, level surfaces.
- ✓ Never exceed the maximum load capacity of 40 kg per tray.
- ✓ Ensure loads are evenly distributed across each tray.
- ✗ **DO NOT** stand, sit, climb, or ride on the trolley.
- ✓ Never use the trolley as a skateboard, step, or ladder.
- ✓ Keep hands, feet, and loose clothing away from the castor wheels during movement.
- ✗ **DO NOT** use the trolley on slopes, ramps, uneven terrain, or stairs.
- ✓ Avoid rolling the trolley over cables, debris, or floor cracks as this may damage the castors.
- ✓ Inspect the trolley regularly for loose fasteners, damaged wheels, or cracks.
- ✗ **DO NOT** modify the trolley or use non-approved parts.

2. INTRODUCTION

Composite garage workshop trolley with a 40kg capacity per level, featuring shelves with four integrated slots for organising tools or bottles. Fitted with four swivel castors for easy movement, slots together in minutes and is supplied with two removable waste bins for simple cleaning and spill control.

3. SPECIFICATION

Model No:	CX315
Capacity:	40kg/Level
Castor wheels:	4 × universal swivel wheels
Nett Weight:	9.45Kg
Overall Size (W x D x H):	895 x 430 x 970mm
Overall dimensions:	Approximately 97 cm high (including handles)
Number of trays:	3
Material:	Polypropylene
Resistance:	Water resistant (not waterproof)

4. CONTENTS

- 3 × Polypropylene trays.
- 8 × Polypropylene support posts.
- 4 × Rubber swivel castors.
- 2 × Polypropylene handles.
- 2 × Bins.
- Fixings (screws as supplied).




5. ASSEMBLY SEE FIG.1

- 5.1. Attach the four castor wheels to the base tray and ensure they are securely fastened.
- 5.2. Insert the support posts into each corner of the base tray.
- 5.3. Secure the support posts using the supplied screws.
- 5.4. Place the middle tray onto the support posts and secure it.
- 5.5. Repeat the process for the top tray.
- 5.6. Attach the handles to the top tray and secure with the supplied screws.
- 5.7. Check that all fixings are tight before use.

□

WARNI

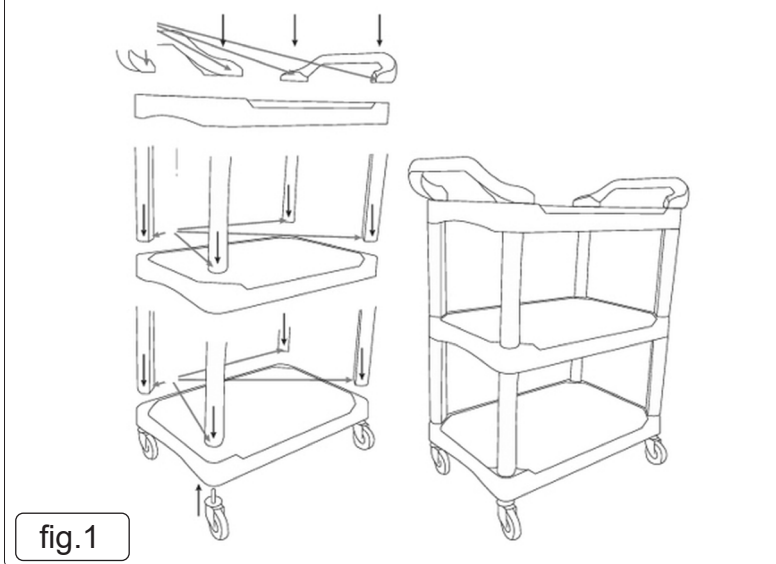

6. OPERATION

- 6.1. Push the trolley using the handles; **DO NOT** pull from the side trays.
- 6.2. Move slowly, especially when fully loaded.
- 6.3. Stop the trolley completely before adding or removing items.
- 6.4. Use caution when operating in confined or busy work areas.

7. MAINTENANCE

- 7.1. Check all screws, posts, and castors periodically and tighten if required.
- 7.2. Clean using mild detergent and water.
* **DO NOT** use abrasive cleaners or solvents.
- 7.3. Store in a dry, secure location when not in use.

8. STORAGE AND DISPOSAL

- 8.1. Store the trolley in a safe location away from children.
* **DO NOT** stack heavy objects on the trolley when stored.
- 8.2. Dispose of the product in accordance with local waste and recycling regulations.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Jack Sealey Ltd t/a Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK

Jack Sealey (EU) Ltd t/a Sealey Group, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland

Tel: 01284 757500 • Email: sales@sealey.co.uk • Web: www.sealey.co.uk