


baridi

High Basin Mixer Tap with Clicker Waste, Tall Deck Mounted Bathroom Faucet

DH394 - DH395

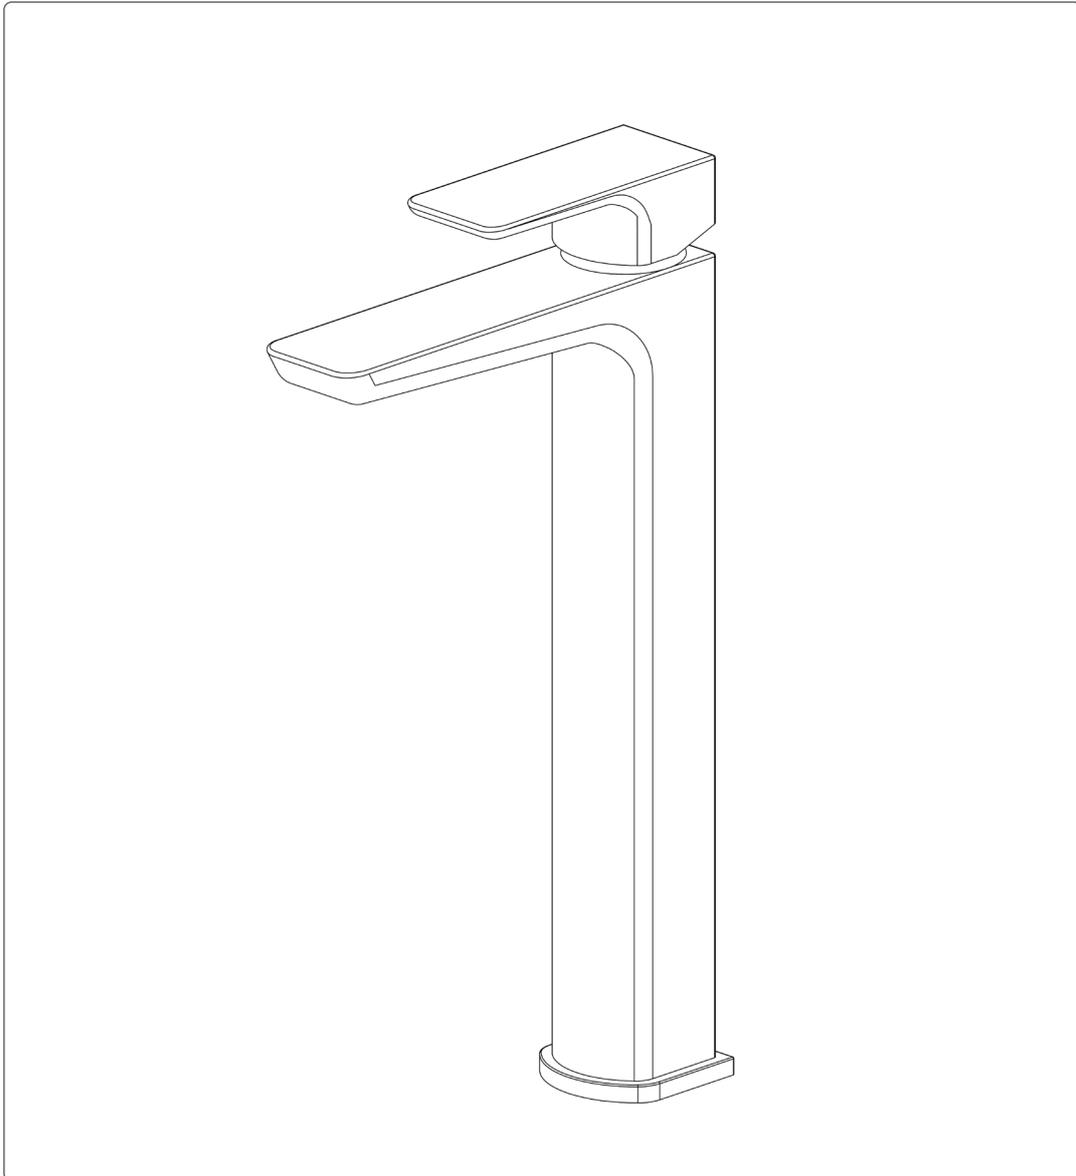

Model No.s DH394 DH395

Thank you for purchasing a Dellonda product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

Important Information

Please read these instructions carefully. Note the safe operational requirements, warnings & cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and/or personal injury and will invalidate the warranty. Keep these instructions safe for future use.



Refer to
instruction
manual

Specification

Model No:	DH394	DH395
Colour of Product:	Silver	Black
Nett Weight:	2.22kg	2.22kg
Product Dimensions (W x D x H):	50 x 170 x 314mm	50 x 170 x 314mm


Safety Instructions

• GENERAL SAFETY

- Installation should be carried out by a qualified plumber or a competent person.
- Ensure the water supply is turned off before installation.
- This tap is designed for domestic use only.
- **DO NOT** exceed the recommended water pressure (typically 0.5–5.0 bar). Excessive pressure may damage the tap.
- **DO NOT** use abrasive cleaners, solvents, or acidic chemicals, as these may damage the surface finish.
- Check all connections for leaks after installation.
- Keep small components away from children during installation.

• PRE-INSTALLATION CHECKS

- Ensure the basin mounting hole is the correct size for the tap.
- Flush water supply pipes thoroughly to remove debris.
- **CONFIRM ALL COMPONENTS ARE INCLUDED:**
- Basin tap.
- Fixing kit (nut, washer, gasket).
- Flexible hoses.
- Check that the tap is compatible with hot and cold water supply.

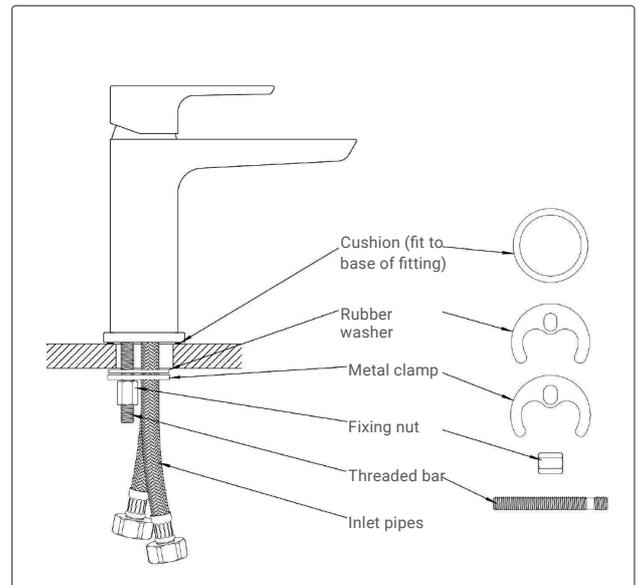

Installation

NOTE: Certain fitting parts may vary from illustration.

A. Preparing and Securing the Tap

1. Insert the threaded bar into the base of the tap body.
2. Position the tap through the mounting hole in the basin.
3. Fit the rubber washer to the underside of the basin, then place the metal fixing clamp in position.
4. Screw the fixing nut onto the threaded bar and tighten securely. **DO NOT** overtighten.

B. Installing the Basin Waste

5. Install the basin waste using the tapered washer or a suitable sealing compound (not supplied).
6. Fit the sealing washer to the underside of the basin waste.

C. Connecting Pipework

7. Carefully connect the inlet pipes to the tap body (pipe style may vary). Overtightening is not necessary.
8. Ensure any new metal pipework is adequately earthed. Seek professional advice if unsure.
9. Connect the water supply pipes to the inlet pipes, ensuring isolating valves (not supplied) are installed.

D. Commissioning and Testing

10. Ensure the tap valves are in the open position.
11. Open the isolating valves.
12. Turn on the water supply and allow water to run for several minutes to flush out debris.
13. Check all connections for leaks and tighten if required.

Maintenance

- Periodically check all connections and fittings for signs of leakage or wear.
- If water flow is reduced, the aerator (if fitted) may require cleaning to remove debris or limescale.
- Operate the tap regularly to ensure smooth movement of internal components.
- Any maintenance or repair work should be carried out by a qualified person.

Cleaning

- Clean the tap regularly using a soft cloth and warm soapy water.
- Rinse thoroughly with clean water and dry with a soft cloth after cleaning.
- **DO NOT** use abrasive cleaners, scouring pads, solvents, or acidic/alkaline cleaning agents, as these may damage the surface finish.
- Limescale deposits can be removed using a mild descaling solution suitable for plated surfaces.

End of Life

At the end of its service life, the tap should be removed by a competent person. Where possible, separate the components and dispose of them in accordance with local recycling and waste regulations. Metal components can typically be recycled. **DO NOT** dispose of this product with household waste where recycling facilities are available.

Environment Protection and Waste Protection and Electrical Equipment Regulations (WEEE)

Recycle unwanted packaging materials. When this product is no longer required, or has reached the end of its useful life, please dispose of it in an environmentally friendly way. Drain any fluids (if applicable) into approved containers, in accordance with local waste regulations. Under the Waste Batteries and Accumulators Regulations 2009. It is our policy to continually improve products and we reserve the right to alter data, specifications and parts without prior notice. No liability is accepted for incorrect use of this product. Guarantee is 12 months from purchase date, proof of which is required for any claim.

Jack Sealey Ltd t/a Baridi, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK
Jack Sealey (EU) Ltd t/a Baridi, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland
Tel: 01284 757575 • **Email:** support@baridi.co.uk • **Web:** www.baridi.co.uk