

baridi

Freestanding Bath Mixer Tap with Shower, Contemporary Design

DH400 - DH401



Model No.s DH400 DH401

Thank you for purchasing a Dellonda product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

Important Information

Please read these instructions carefully. Note the safe operational requirements, warnings & cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and/or personal injury and will invalidate the warranty. Keep these instructions safe for future use.



Refer to
instruction
manual

Specification

Model No:	DH400	DH401
Colour of Product:	Silver	Black
Nett Weight:	6.76kg	6.76kg
Product Dimensions (W x D x H):	180 x 280 x 1000mm	180 x 280 x 1000mm

Safety Instructions

• GENERAL SAFETY

- Installation should be carried out by a qualified plumber or a competent person.
- Ensure the water supply is turned off before installation.
- This tap is designed for domestic use only.
- **DO NOT** exceed the recommended water pressure (typically 0.5–5.0 bar). Excessive pressure may damage the tap.
- **DO NOT** use abrasive cleaners, solvents, or acidic chemicals, as these may damage the surface finish.
- Check all connections for leaks after installation.
- Keep small components away from children during installation.

• PRE-INSTALLATION CHECKS

- Flush water supply pipes thoroughly to remove debris.
- **CONFIRM ALL COMPONENTS ARE INCLUDED:**
- Tap.
- Fixing kit.
- Check that the tap is compatible with hot and cold water supply.
- **TOOLS** (Not included, see table below for tools required).

Drill with masonry/appropriate floor bit	Spirit level
60–100mm hole cutter (core drill)	Screwdrivers
PTFE tape (plumber's tape)	Pencil & tape measure
Silicone sealant (optional)	Adjustable spanner

Installation

NOTE: Certain fitting parts may vary from illustration.

All steps below correspond to the illustration provided.

Refer to the accompanying diagram for part identification and assembly sequence. Ensure all components are installed in the order shown.

Floor Preparation

Step 1:

Drill a circular opening in the finished floor with a diameter between 60mm (minimum) and 100mm (maximum), ensuring a depth of 75mm to accommodate the pipework and mounting assembly. Once the opening has been prepared, position the tap body over the hole and accurately mark the six fixing points through the mounting flange. Remove the tap, drill the six fixing holes to the appropriate depth for the floor construction, and insert suitable wall plugs or anchors compatible with the floor material to ensure secure fixing.

Step 2:


Drill six fixing holes into the floor around the main opening and insert suitable wall plugs.

Step 3:

Slide the decorative cover (1) onto the lower section of the upright tube (2).

Step 4:

Carefully pass the feed pipes (5) through the prepared floor opening, ensuring they are not twisted or kinked. Position the tap body so that the mounting flange (4) aligns precisely with the pre-drilled fixing holes. Once correctly aligned and level, secure the mounting flange to the floor using the previously installed wall plugs and suitable screws, tightening evenly to ensure a firm and stable installation.

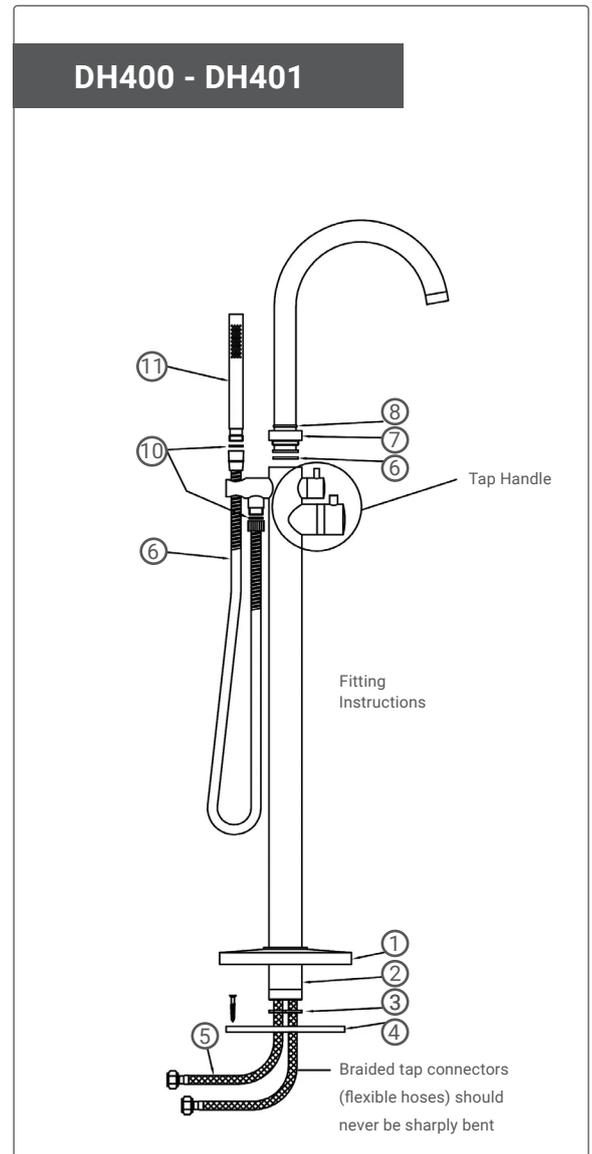

Step 5:

Push the decorative cover (1) down over the mounting assembly until it sits flush on the finished floor, fully concealing the fixing flange and screws. Ensure the cover is correctly aligned and seated evenly.

Step 6:

Select the appropriate O-ring (6) from the spare parts pack (choose the correct thickness supplied for your product). Insert the O-ring into position between the spout and the upright tube (2), ensuring it is seated evenly to provide a watertight seal.

Step 7:

Screw the collar (7) of the spout onto the upright tube (2). Tighten by hand only. **DO NOT** use tools or over tighten, as this may damage the threads or surface finish.

Step 8:

Connect the hose (9) to the mixer outlet and tighten securely. Then attach the handset (11) to the opposite end of the hose. Ensure the sealing washers (10) are correctly positioned inside each connection before tightening to prevent leakage. Tighten firmly by hand; **DO NOT** over tighten.

Step 9:

Connect the feed pipes to the hot and cold water supplies in accordance with local plumbing regulations. Slowly restore the water supply and check all connections thoroughly for leaks. Operate the mixer and handset to confirm correct function and ensure all joints remain watertight under pressure.

Maintenance

- Periodically check all connections and fittings for signs of leakage or wear.
- If water flow is reduced, the aerator (if fitted) may require cleaning to remove debris or limescale.
- Operate the tap regularly to ensure smooth movement of internal components.
- Any maintenance or repair work should be carried out by a qualified person.

Cleaning

- Clean the tap regularly using a soft cloth and warm soapy water.
- Rinse thoroughly with clean water and dry with a soft cloth after cleaning.
- **DO NOT** use abrasive cleaners, scouring pads, solvents, or acidic/alkaline cleaning agents, as these may damage the surface finish.
- Limescale deposits can be removed using a mild descaling solution suitable for plated surfaces.

End of Life

At the end of its service life, the tap should be removed by a competent person. Where possible, separate the components and dispose of them in accordance with local recycling and waste regulations. Metal components can typically be recycled. **DO NOT** dispose of this product with household waste where recycling facilities are available.

Environment Protection and Waste Protection and Electrical Equipment Regulations (WEEE)

Recycle unwanted packaging materials. When this product is no longer required, or has reached the end of its useful life, please dispose of it in an environmentally friendly way. Drain any fluids (if applicable) into approved containers, in accordance with local waste regulations. Under the Waste Batteries and Accumulators Regulations 2009. It is our policy to continually improve products and we reserve the right to alter data, specifications and parts without prior notice. No liability is accepted for incorrect use of this product. Guarantee is 12 months from purchase date, proof of which is required for any claim.