

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.1 GENERAL SAFETY

- ▲ **DANGER! Take care when using and moving ladders in the vicinity of power cables - risk of potentially fatal electric shock.**
- **WARNING!** Ensure Health and Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.
- ✓ Familiarise yourself with the application and limitations of the ladder stand-off, as well as the potential hazards.
- ✓ Maintain the equipment in good condition.
- ✓ Replace or repair damaged parts. Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.
- **WARNING!** Use ladder on level and solid ground and either have an assistant stand on the lowest rung or otherwise anchor the base of the ladder to prevent slipping. When viewed from the front, the top of the ladder section(s) must always be directly above the base.
- ✓ Place ladder at an angle of 65° to 70° - foot of ladder 1 metre from wall for each 3 metres up - for stability.
- ✓ Where possible, lash top of ladder to a fixture to prevent slipping.
- **WARNING!** Never over-reach when on the ladder stand-off.
- ✓ Keep children and unauthorised persons away from the working area.
- x **DO NOT** use the ladder stand-off for any purpose other than that for which it is designed.
- x **DO NOT** use the equipment if any parts are damaged or missing as this may cause failure and/or personal injury.
- x **DO NOT** allow children to climb the ladder.
- x **DO NOT** use the equipment when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- ✓ When not in use store in a safe, dry, childproof area.


2. INTRODUCTION AND CONTENTS

2.1 Introduction

Aluminium framed stand-off, fits to any ladder. Offers superb stability at the top of a ladder with a wide span of 1000mm. Positions ladder 360mm away from work area. Fitted with rubber feet to help prevent slipping.

2.2 Contents

U Bolts	2
Wing Nuts	4
Washers	9
Bolts	5
Nylock Nuts	5
Paint Can Hook	1
Support Bar	1
Stand-Off Bar	1
Ribbed Plate	1

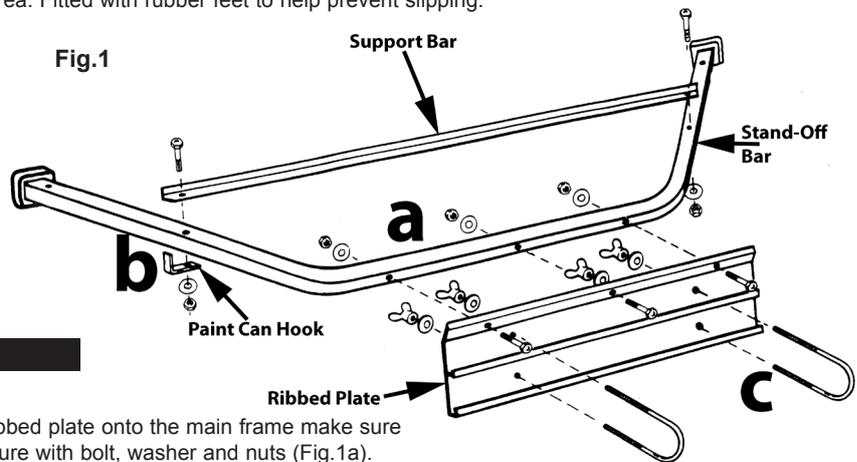


3. ASSEMBLY & USE

3.1 Stand-Off Assembly.

- 3.1.1 Assemble the stand-off as Fig.1, bolt the ribbed plate onto the main frame make sure that the ribbed side is facing outwards, secure with bolt, washer and nuts (Fig.1a).
- 3.1.2 Attach the support bar to the main frame using a bolt washer and nut, choose which side you wish to have the paint hook and include that between the frame and washer (Fig.1b).

3.2 Attach the Stand-Off to the ladder.

- 3.2.1 The Stand-Off is secured to the ladder with the two U bolts, washers and thumb screws (Fig.1c, Fig.2) ensure that the angled ribbed plate is flush with the angle of the ladder.

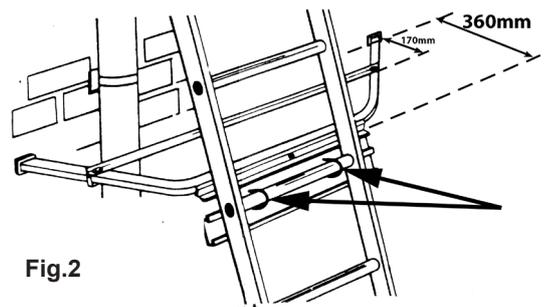

4. MAINTENANCE

- 4.1 Periodically check that all nuts are tight and secure, but **DO NOT** overtighten.
- 4.2 Check that the rubber feet on the Stand-Off are in good condition and are not worn, replace if necessary.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of this product. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** For a copy of our latest catalogue call us on 01284 757525 and leave your full name and address, including postcode.

