



# WEATHERPROOF TRAILER STORAGE BOX WITH LOCK, 45L, 675MM X 305MM X 340MM

MODEL NO: **STB690**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.



**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.




## 1. SAFETY

- ❑ **WARNING! DO NOT** exceed the vehicle/trailer manufacturer's recommended capacity.
- ✓ Install the box in a way that does not impede the trailer's normal performance.
- ✓ Before drilling into the box, ensure drill locations will not damage any brake or fluid lines, electrical wires, fuel tanks, etc.
- ✓ Check the box is locked and secure before each use.
- ✗ **DO NOT** interfere with factory-installed safety equipment.
- ✗ **DO NOT** use this product for purposes other than those which it is intended.
- ✗ **DO NOT** modify the product.

## 2. INTRODUCTION

Easy to use combination lock ensures contents are secure from theft or damage. Weatherproof compression locking seal makes sure contents are fully protected from water and dust. Supplied with brackets and hardware to mount to a trailer. Includes foam gasket for added protection against water and dust. Designed to utilise the space on a trailers A-frame, for securely storing tools and equipment. Manufactured from high quality polypropylene which is highly resistant to UV rays and well suited to a wide range of temperatures.


## 3. ASSEMBLY

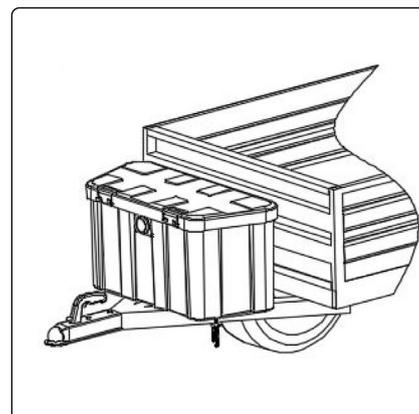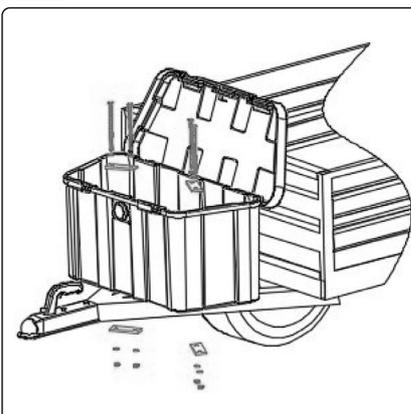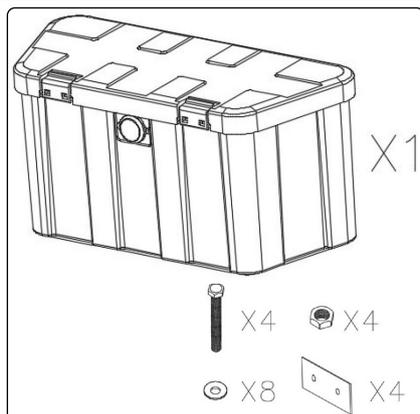

- 3.1. Choose assembly position as per the above safety guidelines.
- 3.2. Drill holes on the bottom of the plastic box.
- 3.3. Assemble clamp plates and secure with fixings.

## 4. CHANGING LOCK COMBINATION

- 4.1. Open the box using the initial password '0000'.
- 4.2. Position the lock in the vertical position, as shown in fig. 1.
- 4.3. Turn the locking pin to the horizontal position.
- 4.4. Set the new password combination.  
**IMPORTANT:** make a note of your new password and keep it safe.
- 4.5. Turn the pin back to the vertical position to 'lock-in' the new password.

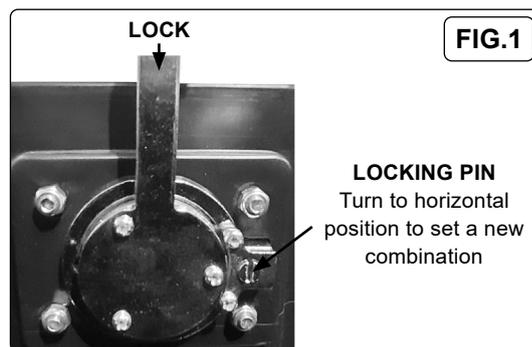

### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk