

Thank you for purchasing a Sealey power product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



**IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE USE.**

### 1. SAFETY INSTRUCTIONS


- WARNING!** Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.
- ✓ Familiarise yourself with product application and limitations, as well as the specific potential hazards peculiar to this product.
- ✓ Maintain the pump in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. Use genuine parts only. Non authorised parts will invalidate the warranty.
- ✓ Ensure safety eye protection and protective clothing are worn when using this product.
- ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non slip shoes.
- ✓ Keep children and unauthorised persons away from the working area.
- ✓ Dispose of waste liquids in accordance with local authority regulations.
- ✗ DO NOT dismantle, tamper with or adapt the pump for any purpose other than for which it is designed.
- ✗ DO NOT use the unit if it has been dropped or mishandled, check the unit to ensure there is no damage.
- ✗ DO NOT use the pump as a handle to move the fluid drum.
- ✓ Keep the pump clean and store in a safe, dry, childproof location.
- WARNING!** DO NOT allow uncontrolled discharge of fluids thus polluting the environment.

### 2. APPLICATION

Polypropylene rotary pump, specially fitted with Bakelite vanes for transferring AdBlue as well as acids, alkalis, oils and other fluids of similar viscosity. Supplied with 1300mm polyethylene extension hose. Features 2" BSP connector suitable for use on 205ltr drums. Delivers approximately 0.35ltr/revolution.

### 3. ASSEMBLY

- 3.1 Screw the spout (fig.1A) into the pump body (fig.1B).
- 3.2 Slide handle (fig.1D) over the handle shaft. Secure by screwing bolt (fig.1C) into the recess in the shaft.
- 3.3 Connect the three extension tubes (fig.1E) together using the couplings (fig.1F). Then screw into bottom of the pump.
- 3.4 Slide the 2" BSP connector (not shown) over the extension tubes, then screw the filter (fig.1G) to the bottom of the extension tubes.
- 3.5 Insert the pump assembly into a 205ltr drum and screw in the 2" BSP connector, tighten the thumb screw in the connector to secure the pump.
- 3.6 TP57 is now ready for use, ensure that the handle is tight before using the pump.

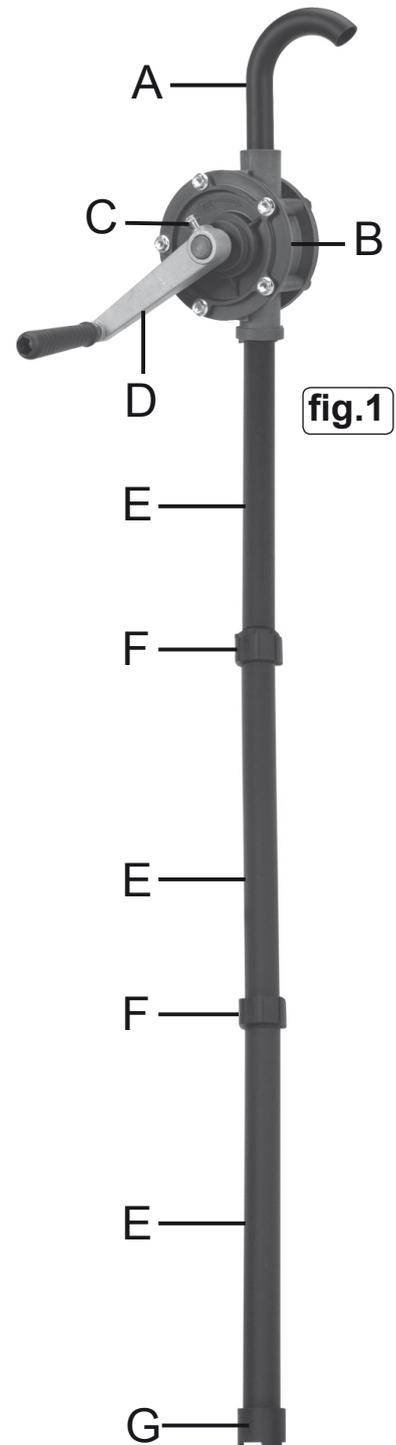

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No liability is accepted for incorrect use of this product.

**WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim.

**INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.