



INSTRUCTIONS FOR:

ADJUSTABLE PRESS SUPPORT PLATE

MODEL NO: **VS7037**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions and maintained properly, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to Instruction Manual



Wear Eye Protection

1. SAFETY

- WARNING!** Ensure Health and Safety, local authority and general workshop practice regulations are adhered to when using tools.
- DO NOT** use the kit if any parts are missing or damaged.
- DO NOT** use this tool for any purpose other than that for which it is designed.
- Maintain the tool components in good and clean condition for best and safest performance.
- Wear approved eye protection. A full range of personal safety equipment is available from your Sealey dealer.
- Wear suitable clothing to avoid snagging. Do not wear jewellery and tie back long hair.
- DO NOT** use when tired or under the influence of drugs, alcohol or intoxicating medication.
- Keep children and other unauthorised persons away from the working area.
- Ensure there is adequate lighting prior to using this tool.


2. INTRODUCTION

Designed to be used with a standard workshop press. Adjustable diameter and six interchangeable support legs provides quick alignment of hub or suspension frame for secure and level pressing. Ideal when removing and installing wheel bearings and bushes.


3. SPECIFICATION

Model No VS7037
Operating Diameter: 78-100mm

4. OPERATION

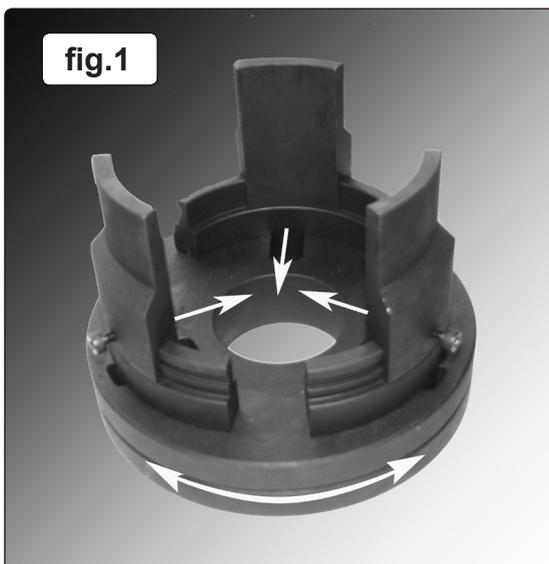

- 4.1. The support plate is supplied with 2 sets of supports (figs 1 & 2) . If required, these supports may be mixed in use.
- 4.2. The supports can be changed by sliding onto the carriers and fixing by means of the setscrew.
- 4.3. Once fitted, the supports can be adjusted radially by turning the lower section whilst holding the upper (fig.1).
- 4.4. One of the smaller supports incorporates a screw adjustment to allow exact levelling of the workpiece.
- 4.5. Support the workpiece to allow free exit for the component to be pressed out (fig.3).

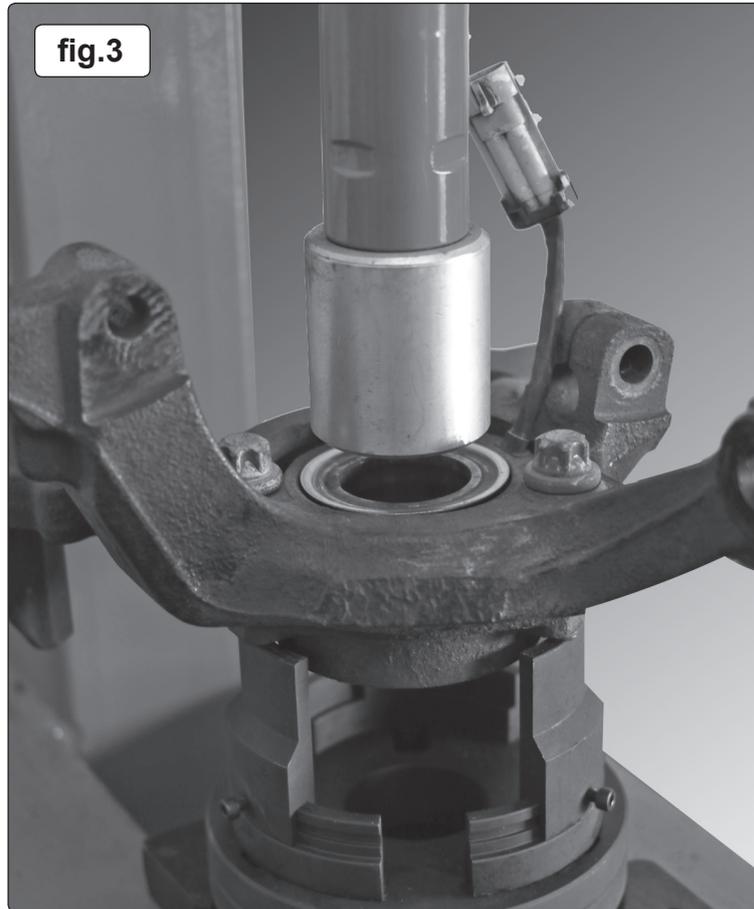

Environmental Protection



Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable dispose of it according to local regulations.

NOTE: It is our policy to improve products continually and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP32 7AR



01284 757500



01284 703534



www.sealey.co.uk



sales@sealey.co.uk