





AIR/PRO
Disposable
Visor Overlay
AIR/P/3C &
AIR/P/3G
Visor
WP-AIR/P/07



INST/AIR/P/VO v2.2

Please
 read carefully
 before use

trend[®]
 routing technology

VISOR OVERLAY
REF. AIR/P/3C & AIR/P/3G

SPARE VISOR
REF. WP-AIR/P/07

Thank you for purchasing this Trend product which should give lasting performance if used in accordance with these instructions.

INTENDED USE

This accessory is intended to be used with the Airshield Pro.

SAFETY

Please read and understand the safety points at the end of this instruction as well as the power tool instructions before use.

PLEASE KEEP THESE INSTRUCTIONS IN A SAFE PLACE.

Users must be competent in using woodworking equipment before using our products.


Ensure working position is comfortable. Please keep children and visitors away from tools and work area. All tools have a residual risk, so must therefore be handled with caution.

VISOR OVERLAY
FITTING INSTRUCTIONS

- Peel away visor overlay and ensure visor surface is clean.
- Peel backing paper from adhesive strips on replacement visor overlay. Position centrally onto visor surface, press down adhesive strips and remove protective paper.

SPARE VISOR
FITTING INSTRUCTIONS

- Remove the seven face seal pop studs from visor.
- Replace the old or damaged visor assembly as shown (top right).

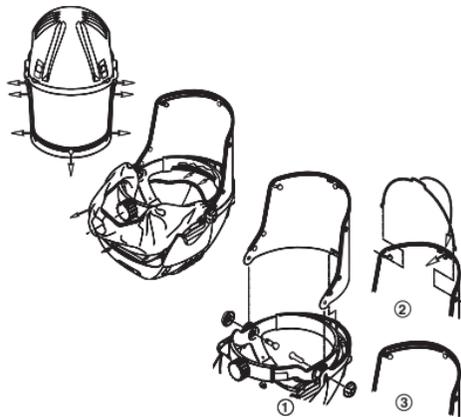

- Release nuts and push screws inwards, release the front tab and lift visor from the helmet.
- Fit replacement visor ensuring slot in visor locates on tab and bottom edge in grooves, secure with screws and nuts.
- Fit visor stiffener wire. Insert the wire ends into the outer slots provided and rotate to engage securely in the centre slot.
- Visors should be stored out of direct sunlight and replaced at least every 5 years.

© Trend Machinery & Cutting Tools Ltd. 2014 E&OE
® All trademarks acknowledged

GB Trend Machinery & Cutting Tools Ltd.
Odhams Trading Estate St Albans Road
Watford WD24 7TR England
Tel: 0044(0)1923 249911
technical@trendm.co.uk
www.trend-uk.com

USA Trend Routing Technology Inc.
7351 West Friendly Avenue
Suite A Greensboro NC 27410
Tel: 336 292 5051
technical@trend-usa.com
www.trend-usa.com



RS 28982
Stockholding
& Supply



MAINTENANCE

Please use only Trend original spare parts and accessories.

Cleaning

- Clean regularly with a damp cloth. Do not use hydrocarbons, chemicals, cleaning fluids or solvents on the visor. If necessary, a mild solution of washing-up liquid and warm water may be used.

Storage

- Store in a clean, dry area away from direct sunlight and heat temp. +5° to +40°C (41°F to 104°F), atmospheric pressure 800 to 1300 mbar, humidity 0 to 90%. Good quality commercial packing should be used.

ENVIRONMENTAL PROTECTION

Recycle raw materials instead of disposing as waste.

Packaging should be sorted for environmental-friendly recycling.

The product and its accessories at the end of its life should be sorted for environmental-friendly recycling.

GUARANTEE

All Trend products are guaranteed against any defects in either workmanship or material, except products that have been damaged due to improper use or maintenance.

APPROVALS

Eye Protection:

BS EN 166:2002, personal eye protection.
Class 1B3.

Optical class 1; high-speed particles - medium energy impact, B; liquid droplets and splashes, 3.

ANSI Z87.1 low energy impact.