

SEALEY

HEAVY-DUTY STEEL ADJUSTABLE WORKBENCH WITH WOODEN WORKTOP 1524MM

MODEL NO: **AP0617**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

1. SAFETY


- WARNING!** Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this workbench.
 - WARNING!** Use workbench on level and solid ground, preferably concrete. Avoid tarmacadam since the workbench may sink into the surface.
 - Locate workbench in a suitable working area.
 - Keep the work area clean, uncluttered and ensure there is adequate lighting.
 - Keep the workbench clean and tidy in accordance with good workshop practice.
 - Keep children and unauthorised persons away from the working area.
 - DO NOT** use the workbench for any purpose other than that for which it is designed.
 - DO NOT** undertake work on the workbench without the workpiece being adequately secured. Use clamps or a vice (not included) to secure the workpiece. Available from your Sealey stockist.
 - DO NOT** use the workbench out of doors.
 - DO NOT** get the workbench wet or use in damp or wet locations or areas where there is condensation.
 - DO NOT** clean the workbench with any solvents which may damage the work surface or the painted surfaces.
- Note!** The assembly of this product will require assistance.

2. INTRODUCTION

Manufactured from heavy gauge steel for long lasting strength. Power bar included, featuring 4 x 230V sockets, 3 x 5V (2.4A) USB ports and a 5V (3A) USB C ports. Adjustable height between 791-991mm. Adjustable feet to ensure level work surface. Fitted with 30mm wooden worktop.


3. SPECIFICATION

Model	AP0617
Overall Size (W x D x H)	1524 x 559 x (791-991)mm
Nett Weight	36.5kg
Capacity	900kg

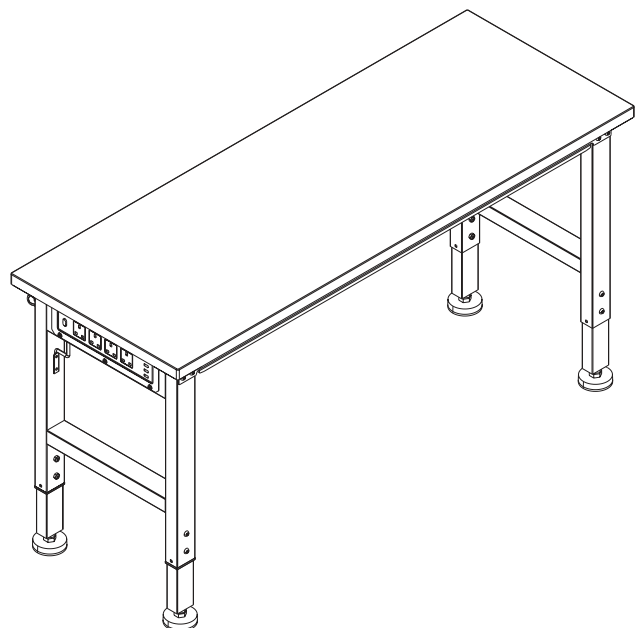

4. CONTENTS

Note: Ensure all components are present. If any components are missing, do not proceed with assembly and contact Sealey.

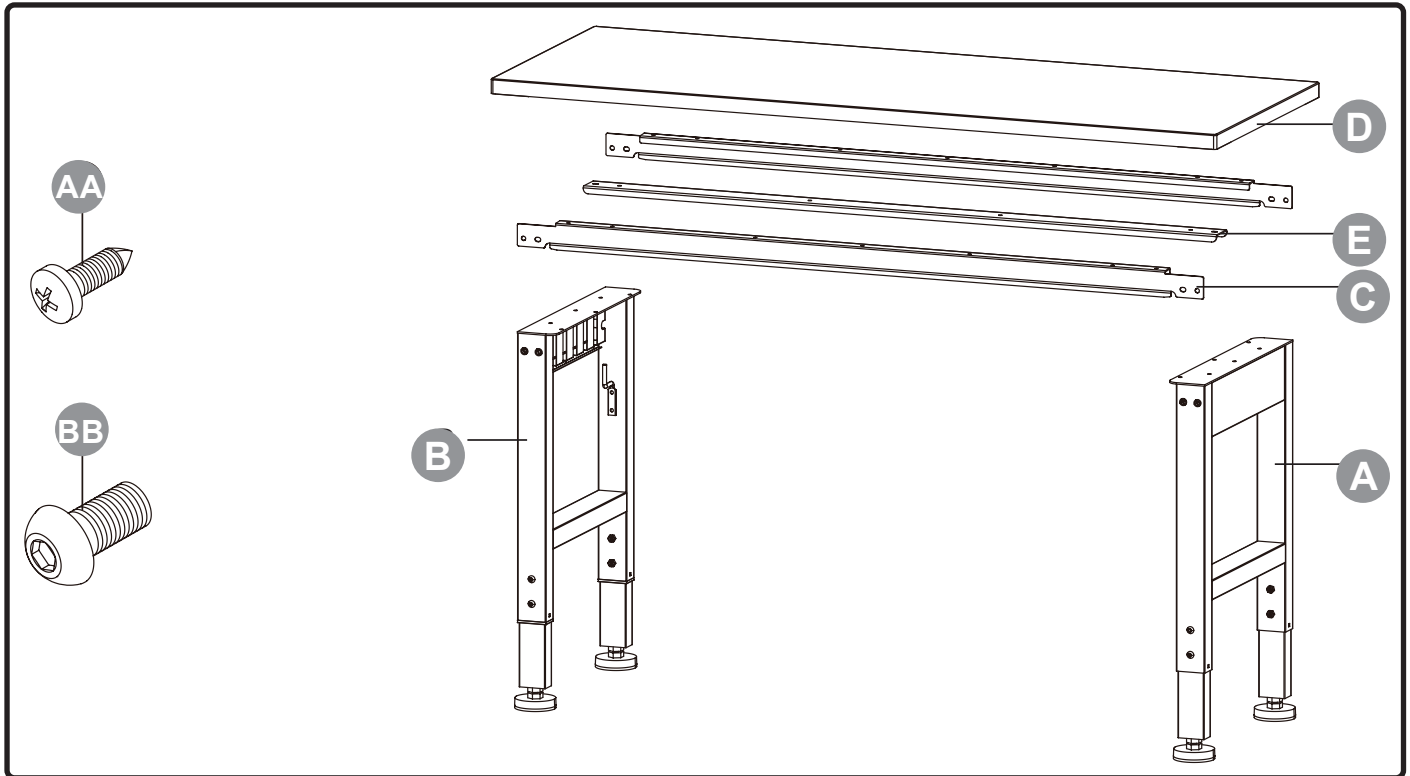

Part	Picture	Description	Quantity
A		Right leg	x1
B		Left leg	x1
C		Beam	x2
D		Wood top	x1
E		Support rod	x1

AA x32
#5x15mm Philips
Head self tapping
screws

BB x10
M8x20mm Inner
hexagonal head bolt

Tools required (Not included)

PH2 Screwdriver



5mm Hex key



5. ASSEMBLY

1

Note: Do not fully tighten all fixings until the final step.



Step 1

Fix the legs A and B with beams C use 8 M8 x20mm Bolts BB.

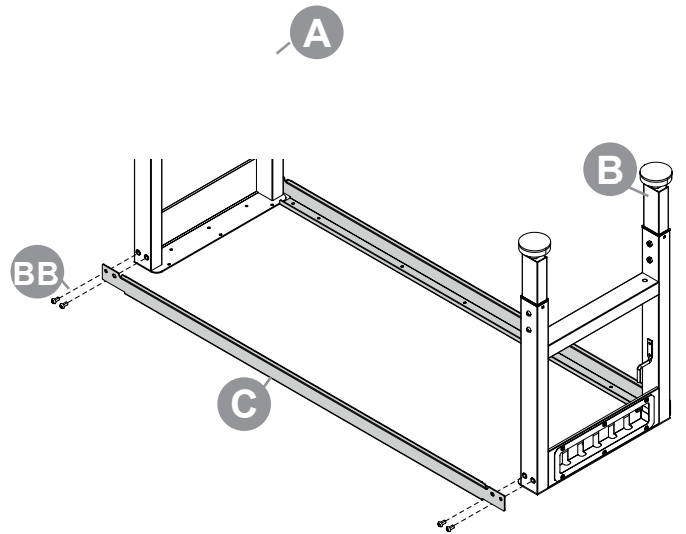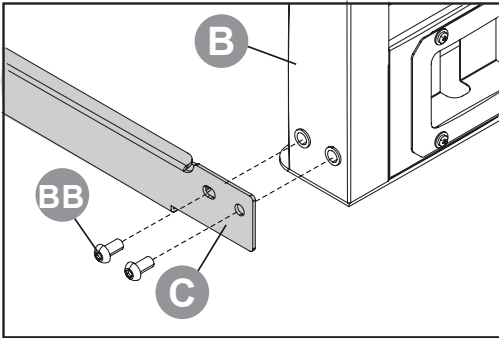


Part	A	B	C	BB
Description	Right leg	Left leg	Beam	M8x20mm bolts
Quantity	1	1	2	8

2



Positioning Label

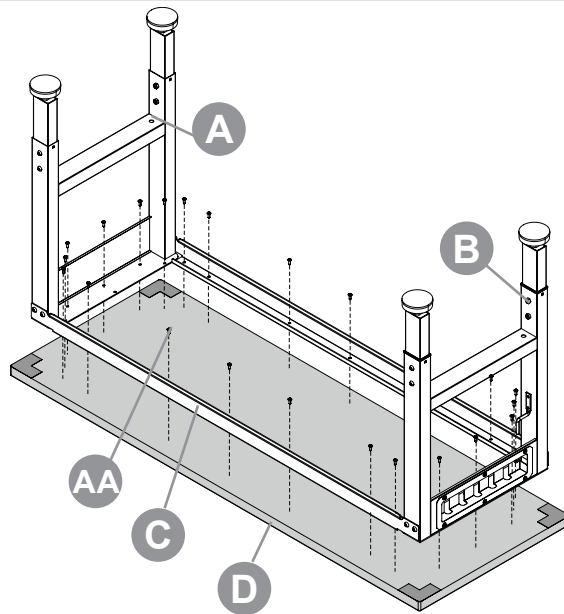

Part	A	B	C	D	BB
Description	Right leg	Left leg	Beam	Wood top	#5x15mm Screws
Quantity	1	1	2	1	24

Step 2



Place the table top D on a flat surface with positioning label facing up. Protect the table with packaging materials. Align the positioning label and install the legs A and B and beams C on the wood top using the 24 #5x15mm screws AA.

3

Step 3

Fix the support rod E on the shaft of the wood top D using the x6 #5 x 15mm screws AA.

NOTE: The support rod E is fixed to the wood to prevent deformation of the wood, this is not to secure legs A and B.

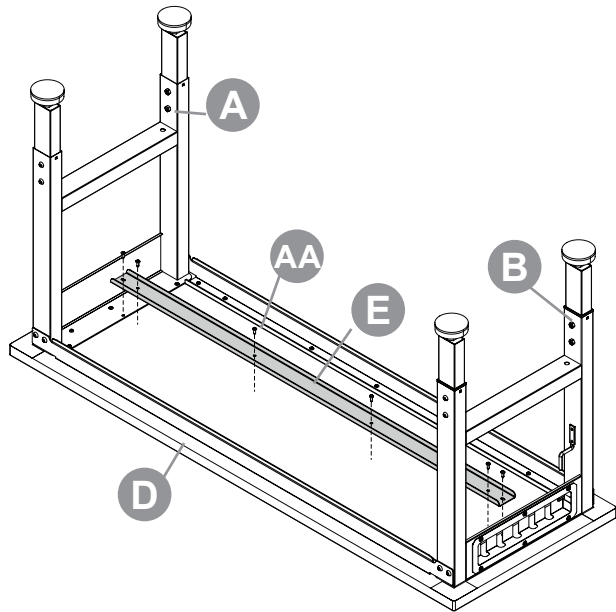
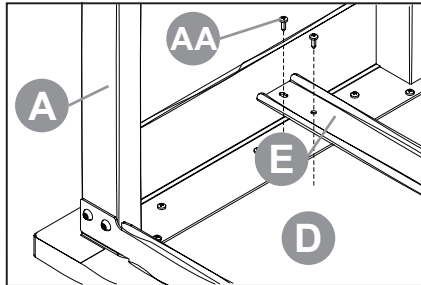


Part	A	B	D	E	BB
Description	Right leg	Left leg	Wood top	Support rod	#5x15mm Screws
Quantity	1	1	1	1	6

4

Step 4



Remove six M4×10 cross-recessed flange bolts, then take off the power bar cover.

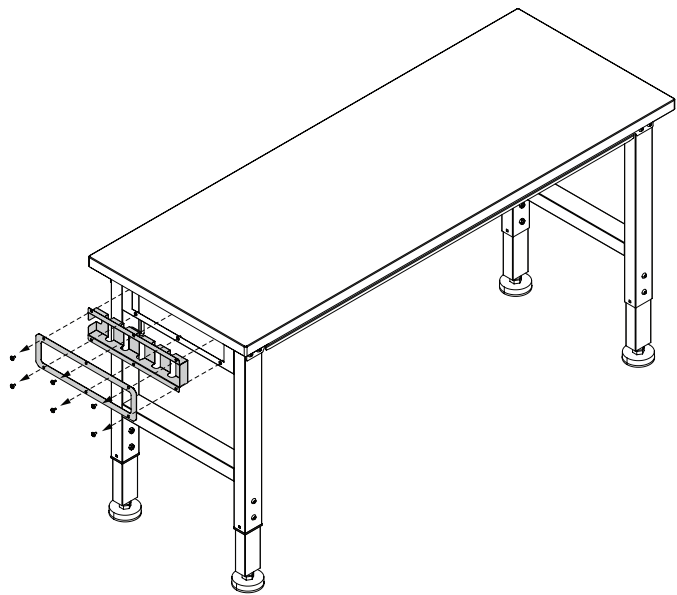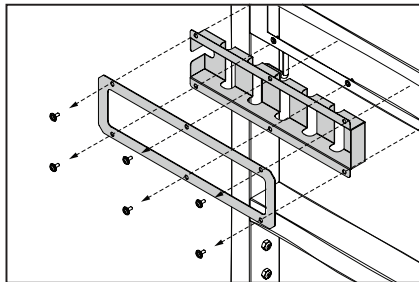

5

Step 5

Insert the power bar into the box and replace the cover. Secure the cover, power bar, and box to the worktable using six M4×10 cross-recessed flange bolts.

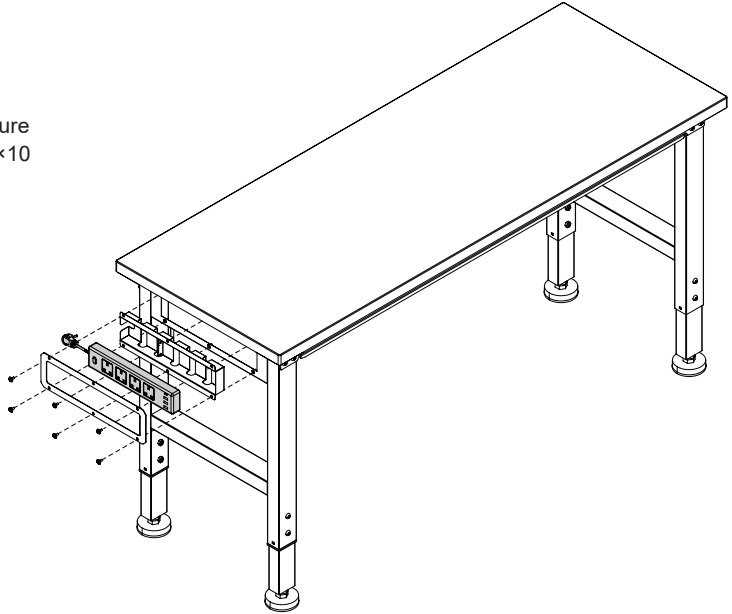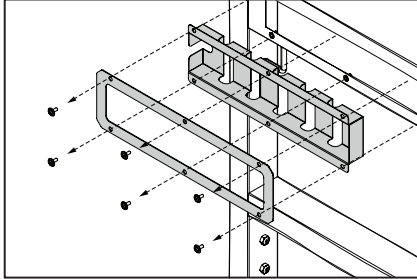

6. END OF LIFE

Please recycle items wherever facilities are available, consult your local authority for guidance on recycling.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 60 months from purchase date. Proof of which is required for any claim.

Jack Sealey Ltd t/a Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK
Jack Sealey (EU) Ltd t/a Sealey Group, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland
Tel: 01284 757500 · Email: sales@sealey.co.uk · Web: www.sealey.co.uk