

SACK TRUCK MODEL NO: CST990.V3

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



instructions

1. SAFETY

- Always load evenly with the centre of gravity of the load as near the centre and rear of the plate as possible.
- ✓ Obtain additional support for large or wide loads to prevent tipping.
- **× DO NOT** overload the truck see Specification.
- * DO NOT leave unattended, especially when loaded, unless the wheels are chocked or the truck is otherwise secured.
- **× DO NOT** use truck on uneven ground and **DO NOT** run over curbs or steps use a ramp.
- **× DO NOT** allow others to ride on the truck.
- **DO NOT** use the truck if any part is damaged, paying particular attention to the wheels.

2. INTRODUCTION

Extra strong tubular steel frame construction. Steel centred pneumatic wheels allow transport over the roughest terrain. Features extra foldaway toe plate for added extension when transporting larger loads. Ideal for delivery drivers, farmers or builders.

3. SPECIFICATION

Capacity:	250kg
Height(s):	
Nett Weight:	14kg
Overall Width:	650mm
Platform Depth:	325/620mm
Wheel Size:	Ø250mm
Wheel Thickness:	90mm

4. OPERATION

- 3.1 Wheels. Ensure each axle is clean from dust and dirt to allow free movement of the wheel. You will need to slide the axle through the frame bushes first.
- 3.2 Slide the wheel (fig.1.2) onto the axle (fig.1.1), followed by the washer (fig.1.3) and complete by pushing the split pin (fig.1.4) through the hole in the end of the axle and bending over to retain.
- 3.3 Repeat for the other side.

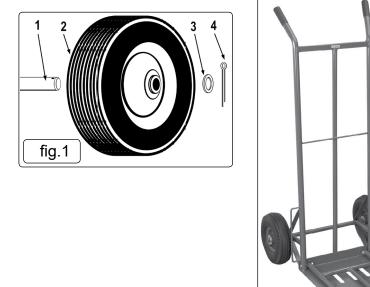


fig.2



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR 01284 757500 01284 703534 R sales@sealey.co.uk www.sealey.co.uk