


baridi

Freestanding Larder Fridge 241L Capacity – (White - DH322, Black - DH323)

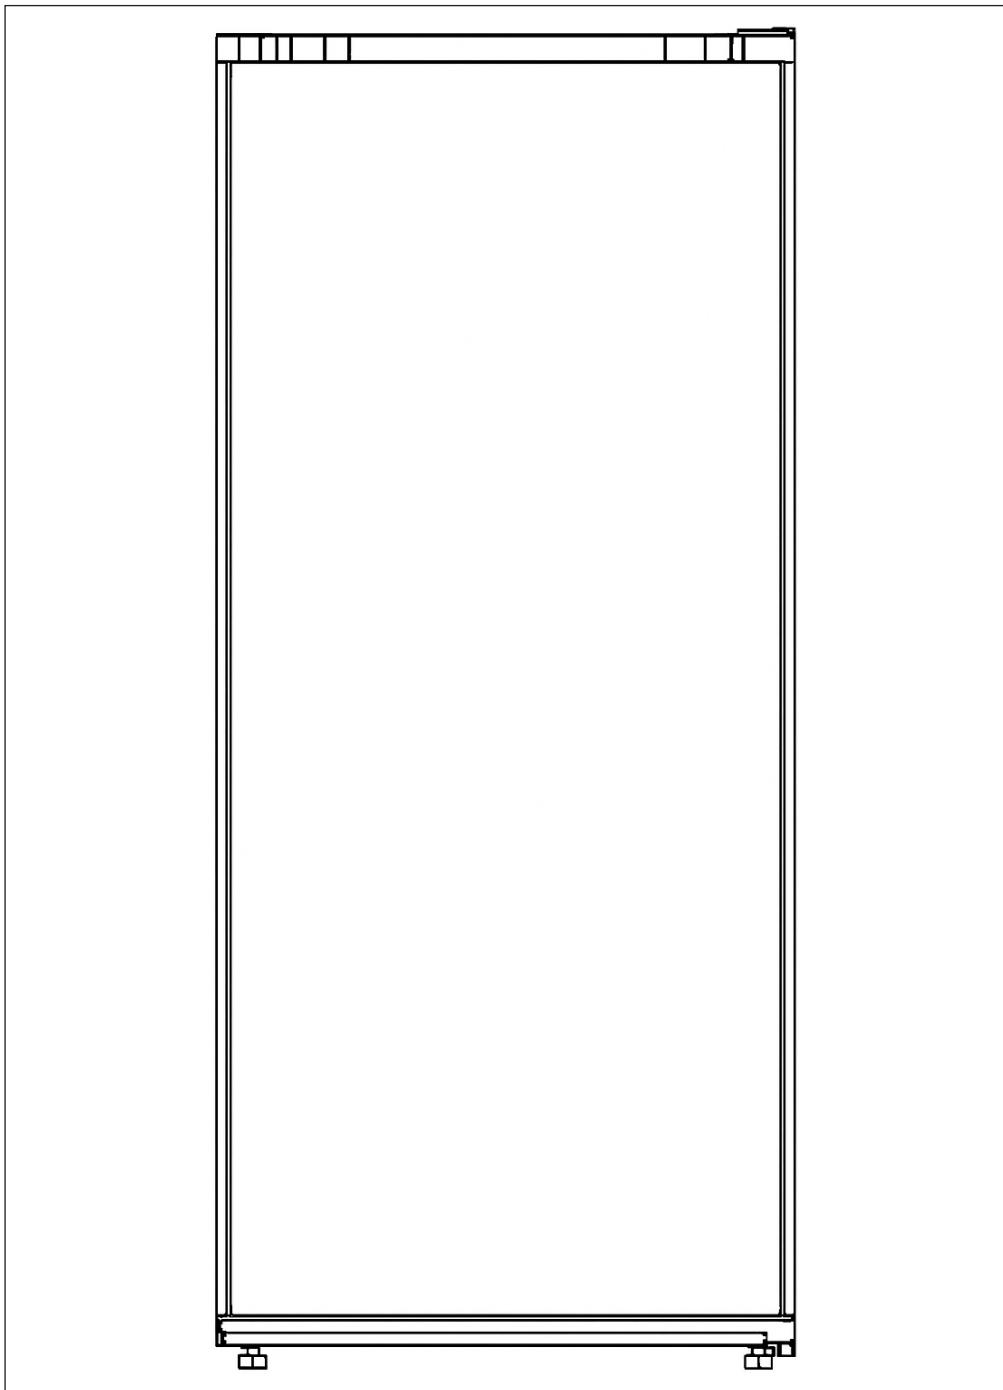

Models: DH322, DH323

Thank you for purchasing a Dellonda product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

Important Information

Please read these instructions carefully. Note the safe operational requirements, warnings & cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and/or personal injury and will invalidate the warranty. Keep these instructions safe for future use.



Refer to
instructions



Indoor use
only



Warning:
flammable
material

1.1. SAFETY

- ✓ Check all electrical equipment and appliances to ensure that they are safe before using. Inspect power supply leads, plugs and all electrical connections for wear and damage. Baridi recommend that an RCD (Residual Current Device) is used with all electrical products.
- **WARNING!** When positioning the appliance, ensure the supply cord is not trapped or damaged.
- ✓ Electrical safety information: It is important that the following information is read and understood.
- ✓ Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
- ✓ Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.
- Important:** Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse - see fuse rating in these instructions.
- ✗ **DO NOT** pull or carry the appliance by the power cable.
- ✗ **DO NOT** pull the plug from the socket by the cable.
- ✗ **DO NOT** use worn or damaged cables, plugs or connectors.
- ✓ Ensure that any faulty item is repaired or replaced immediately by a qualified electrician.
- ✓ If the cable or plug is damaged during use, switch off the electricity supply and remove from use. Supply cord must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- ✓ Ensure that repairs are carried out by a qualified electrician.
- ✗ **DO NOT** designed to be used with an inverter.
- ✗ **DO NOT** use with an extension cord.
- ✗ **DO NOT** turn on the fridge for 4 hours. After the fridge is in place it needs to be left for 4 hours. This allows time for the coolant to settle.


1.2. GENERAL SAFETY

- ✓ Children from age 8 years and above, persons with reduced physical, sensory, or mental capabilities those with lack of experience and knowledge can use the appliance, if they have been given supervision or instruction concerning use of the appliance in a safe way to understand the hazards involved.
- ✓ Children aged from 3 to 8 years are allowed to load and unload refrigeration devices.
- ✓ Children from age 8 years and above, persons with reduced physical, sensory, or mental capabilities those with lack of experience and knowledge can use the appliance, if they have been given supervision or instruction concerning use of the appliance in a safe way to understand the hazards involved.
- ✓ Children shall **NOT** play with the appliance.
- ✓ Cleaning and user maintenance on the appliance shall not be made by children without supervision.
- ✓ The appliance shall be disconnected from its power source during service and when replacing parts and, if that the removal of the plug is foreseen, it shall be clearly indicated that the removal of the plug has to be such that an operator can check from any of the points to which he has access that the plug remains removed.
- ✓ This refrigeration appliance is not intended to be used as a built-in appliance.
- ✓ This refrigerant appliance is intended to be used at ambient temperatures ranging from 16°C to 38°C.
- ✗ **DO NOT** store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- ✓ This appliance is intended to be used in household and similar applications such as:
 - staff kitchen areas in shops, offices and other working environments
 - farm houses and by clients in hotels, motels and other residential type environments
 - bed and breakfast type environments
 - catering and similar non-retail applications.
- ✓ To avoid contamination of food, please respect the following instructions:
 - Opening the door for long periods can cause a significant increase of the temperature in the compartments of the appliance.
 - Regularly clean surfaces that can come in contact with food and accessible drainage systems.
- ✓ Store raw meat and fish in suitable containers in the refrigerator, so that it is not in contact with or drip onto other food.
*One star (-6°C) is perfect for making ice cubes and is sufficiently cold to keep food for 3 or 4 days. ** Two stars (-12°C), *** Three stars (-18°C) will keep food safe for up to 3 months.**** Four stars (below -18°C) means that the compartment provides the ideal conditions for freezing down fresh and precooked food and stores food for 15 to 20 days.
- ✗ Refrigerator **NOT** suitable for freezing foodstuffs.
- ✗ The appliance shall not be exposed to rain.
- ✓ If the refrigerating appliance is left empty for long periods, switch off, defrost, clean, dry, and leave the door open to prevent mould developing within the appliance.
- ✗ **DO NOT** locate multiple portable socket-outlets or portable power supplies at the rear of the appliance.
- ✗ **DO NOT** use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- ✗ **DO NOT** damage the refrigerant circuit.
- ✗ **DO NOT** use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.

PRODUCT FEATURES

No.	Description
1	Thermostat
2	Refrigerator shelves
3	Salad drawer cover
4	Salad drawer
5	Adjustable feet
6	Bottle storage

fig.1

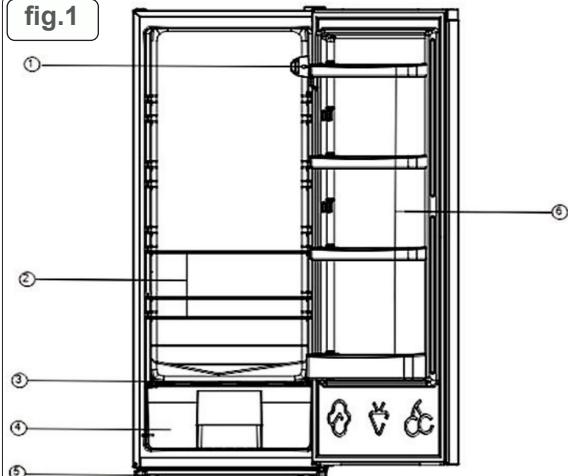

DOOR REVERSAL INSTRUCTIONS

1. Make sure that your refrigerator is unplugged.
2. Carefully remove the hole covers and screws, then lift the top cover. Unscrew the three fasteners securing the upper hinge to the door, and remove the hinge. (fig.2).
3. Remove the refrigerator compartment door from the cabinet.
4. Unscrew the lower hinge from the right side of the cabinet and remove it. (fig.3).
5. Remove the washer and nut securing the pin shaft to the right hole of the lower hinge, then take out the shaft. (fig.4).
6. Insert the pin shaft into the left hole of the lower hinge, then secure it with the washer and nut. (fig.5).
7. Attach the lower hinge to the left side of the cabinet. (fig.6).
8. Remove the screw securing the door stop from the bottom right of the refrigerator compartment door, then transfer the door stop to the bottom left and reinstall it. (fig.7).
9. Install the refrigerator compartment door. (fig.8).
10. Relocate the door bushing from the top right to the top left side of the door, and move the left hole cover to the right side.
11. Remove the hole cover from the top left side of the cabinet and install it on the top right side. (fig.9).
12. Secure the upper hinge to the top left side of the cabinet using the three previously removed screws. Before tightening, ensure the top of the door is level with the cabinet and the rubber gasket forms a proper seal.
13. Fit the hinge cover over the hinge on the top left side of the cabinet.
14. Ensure the rubber gaskets are making a good seal with the cabinet all the way around the doors before tightening the hinge screws.

fig.2

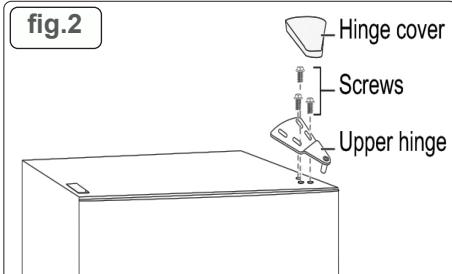


fig.3

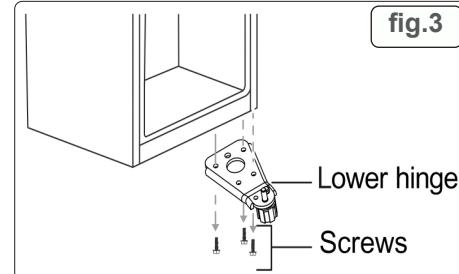


fig.4

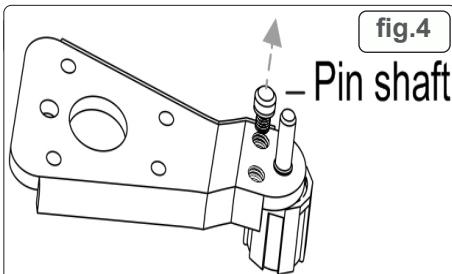


fig.5

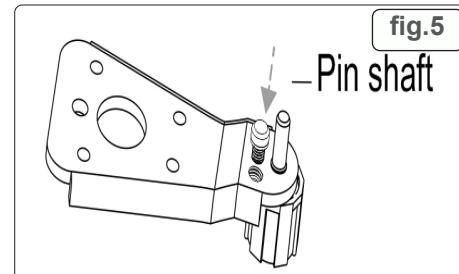


fig.6

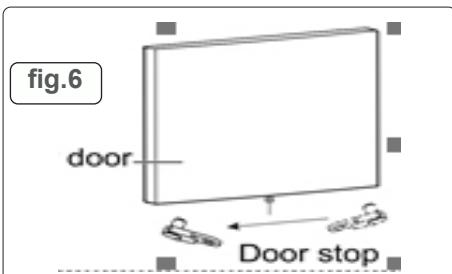
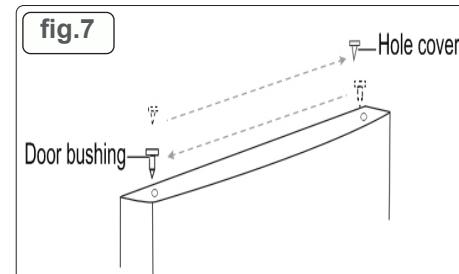


fig.7



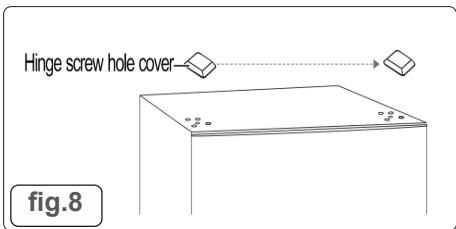


fig.8

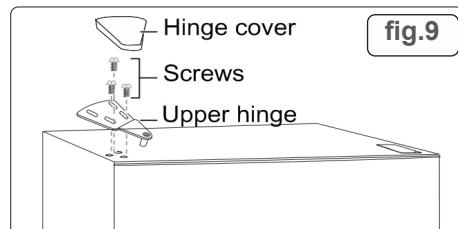


fig.9

SPECIFICATION

MODEL NO:	DH322	DH323
Capacity	241L	241L
Climate Class	N/ST	N/ST
Colour	White	Black
Defrost Method	Manual	Manual
Door Style	Reversible	Reversible
Energy Rating	E	E
Foaming Gas	Cyclopentane	Cyclopentane
Dimensions (W x D x H)	540 x 535 x 1440mm	540 x 535 x 1440mm
Number of Shelves	4 (including crispier cover)	4 (including crispier cover)
Nett Weight	36kg	36kg
Operating Sound Level	39dB	39dB
Power Cable Length	1.8m	1.8m
Rated Current	0.4A	0.4A
Refrigerant	R600a (30g)	R600a (30g)
Temperature Range	"0" to "10°C"	"0" to "10°C"
Type	Freestanding	Freestanding
Supply	220-240V~50Hz	220V-240V~50Hz

• INSTALLATION LOCATION

• VENTILATION

- 1. The position you select for the fridge installation should be well-ventilated and not near a heat source such as cooker, and away from direct sunlight, thus guaranteeing the refrigeration effect while saving energy consumption. **DO NOT** locate the fridge in the damp place, so as to prevent the fridge from rusting.
- 2. Please allow at least the free space requirements shown below when installing the unit.

W	D	H	A	B	C (°)	E	F
540	550	1440	915	1058	125 ±5	50	100

- **NOTE:** Fig.10, Fig. 11 illustrate the space required around the unit installation.
- 3. Level ground
- Place the fridge on the solid and flat ground (floor) to keep it stable, or else, it will vibrate and be noisy. When the fridge is placed on materials such as carpet, straw mat, polyvinyl chloride, solid backing plates should be fitted underneath the unit to prevent damage to the flooring.
- **NOTE:** Unobstructed ventilation shall be maintained around the appliance or in an embedded structure.

• PREPARATIONS FOR USE

- Standing time
- 1. After the fridge is properly installed and well cleaned, **DO NOT** switch it on immediately. Leave the fridge to stand for more than 4 hours to allow gas to settle thus ensuring its normal operation.
- 2. Cleaning
- Wipe the inside of the fridge with a soft cloth.
- 3. Power-on
- Insert the plug into the solid socket to start the compressor. After 1 hour, open the fridge door, if the temperature inside the fridge compartment drops, it indicates the refrigeration system is working normally.
- 4. Storage of food
- After the fridge runs for a period of time, the internal temperature of the fridge will be automatically controlled according to the user's temperature setting. After the fridge is fully cooled, put in your food, which usually need 2~3 hours to be fully cooled. In summer, when the temperature is high, it takes more than 4 hours for the foods to be fully cooled. (Open the door as little as possible before the internal temperature cools down).
- Setting up the fridge may cause noise or image disturbance on your mobile phone, fixed-line telephone, radio receiver, television surrounding it. Keep the fridge as far away from these items as possible.

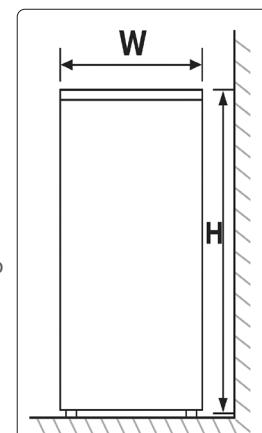


fig.10


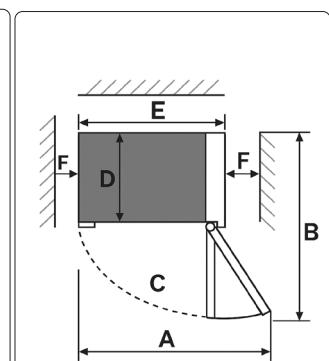


fig.11

- **OPERATION**

- **PRE CHECKS** - Ensure unit is not connected to the power source.
- 1.Clean the fridge with lukewarm water and detergent and wipe dry.
- Note: Electrical components should be cleaned with a dry cloth.
- 2.Turn the thermostat knob which can be adjusted by turning the thermostat between 1 and 7 position (fig.12), and plug the fridge into the wall outlet. (recommended setting is between 3 and 4).
- The compressor will begin to run.
- 3. Check, after 30 minutes of operation, to ensure that the fridge is cold.

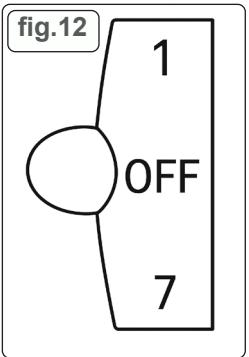

- **TEMPERATURE CONTROL**

- 1. The temperature control is located near the top of the unit.
- 2.Turning the thermostat knob adjusts the temperature of the fridge.
- 3.The marks on the knob represent different settings. Setting "1" is the warmest and setting "7" is the coolest.
- 4. We recommend setting is "3 or 4" for normal operating conditions.

- **INSTRUCTIONS FOR FOOD STORAGE**

- **DO NOT** overload the fridge with food. Keep enough space between foods; if too close, the cold air flow will be blocked, thus affecting the refrigeration performance. **DO NOT** store excessive or overweight foods, to avoid the shelf from being crushed. When storing the foods, keep a distance away from the inner wall; and **DO NOT** place the water-rich foods too close to the fridge rear wall, lest they get frozen on the inner wall.

- **FRIDGE MODE**

- Long-term storage of foods: The chiller compartment, where the temperature is generally controlled to -14°C, is suitable for the preservation of foods for a long term, but the shelf life indicated on the food packages should be abided by.
- For large quantities of meat or fish, cut them into smaller pieces, pack them up separately with bags, and distribute them evenly in the drawer.
- Allow the hot foods to cool down to the room temperature before putting them in the fridge compartment.

- **MOVING THE FRIDGE**

- **DO NOT** drag or lift the fridge directly from its top frame when moving the fridge, to avoid damaging the top frame.

- **MAINTENANCE AND CLEANING**

- **WARNING!** The appliance shall be disconnected from its power source during service and when replacing parts and, if that the removal of the plug is foreseen, it shall be clearly indicated that the removal of the plug has to be such that an operator can check from any of the points to which he has access that the plug remains removed.

- **WARNING!** Before cleaning, unplug the power plug first. **DO NOT** plug in or pull plug out the plug with wet hands because of the risk of electric shock and injury. **DO NOT** spill water directly on the fridge to avoid rust, electricity shock and accidents. **DO NOT** stretch your hands into the bottom of the fridge, since you might be scratched by sharp metal corners.

- Cleaning and user maintenance on the appliance shall not be made by children without supervision.

- **INTERNAL CLEANING AND EXTERNAL CLEANING**

- The food residuals in the fridge are liable to produce bad odour, so the fridge must be cleaned regularly.
- Remove all removable internal fittings and clean them with a soft towel or sponge dipped in warm water or neutral detergent.
- Clear off the dust accumulated on the rear panel and side plates of the fridge often.
- After using detergent, be sure to rinse it with clean water, and then wipe it dry.
- **DO NOT** use bristle brush, steel wire brush, detergent, soap powder, alkaline detergent, benzene, gasoline, acid, hot water and other corrosive or soluble items to cleanse the cabinet surface, door gasket, plastic decorative parts, etc, so as to avoid damage.
- Carefully wipe dry the door gasket, clean the groove using a wooden implement wrapped with cotton string.
- After the cleaning, fix the four corners of the door gasket first, and then embed it segment by segment into the door groove.

- **INTERRUPTION OF POWER SUPPLY OR FAILURE OF THE REFRIGERATING SYSTEM**

- Take care of the refrigerated foods in the event of an extended non-running of the refrigerating appliance (such as interruption of power supply or failure of the refrigerating system).
- Try to open the fridge door as infrequently as possible, in this way food can be safely and freshly kept for hours even in hot summer.
- If you get the power outage notice in advance.
- 1) Adjust the thermostat knob to the high mode an hour in advance, so that foods get refrigerated (**DO NOT** store new food during this time). Restore the temperature mode to the original setting when power supply becomes normal in a timely manner.
- 2) You can also make ice with a watertight container, and put it in the upper part of the fridge, so as to extend the time for fresh food to be stored.
- **NOTE:** Once the fridge is used, use it continuously; and under normal circumstance, **DO NOT** stop its use, so as not to affect the service life.

• **DEFROSTING**

- After a period of use, a thin layer of frost will be formed on the fridge compartment inner walls surface which may affect the refrigeration effect if exceeding 5mm in thickness. In such case, you need to gently scrape the frost off using a wooden/plastic ice scraper rather than a metal or sharp hardware. Frost needs to be cleared off every 3 months or so, and if the drawers and access of foods are affected by frosting, make sure to remove the frost in a timely manner.

• **FOLLOW THE FOLLOWING STEPS TO DEFROST**

- 1. Take out the food, shut off the mains power supply, open the fridge door, and gently remove the frosts from the inner wall with an ice scraper. To speed up the thawing process, you are suggested to place a bowl of hot water inside the fridge, and when the solid ice frosts become loose, use an ice scraper to scrape them off and then take them out.
- 2. After defrosting, clean the fridge inside, and switch on the power supply.
- **NOTE:** When the appliance is not in use for long periods, disconnect from the electricity supply, empty all foods and clean the appliance, leaving the door ajar to prevent unpleasant smells.

• **SAFETY-CHECK AFTER MAINTENANCE**

- Is the power cord broken or damaged?
- Is the power plug firmly inserted into the socket?
- Is the power plug abnormally overheated?
- **NOTE:** Electric shock and fire accident may be caused if the power cord and plug is damaged. If any abnormality, please unplug the power plug.

• **HOW TO DISASSEMBLE THE PARTS**

• **SHELVES**

- Hold one end of the shelf, and lift it up while pulling it outwards.

• **FLIP COVER**

- Keep the flip cover in the vertical direction, align it with the rotating shaft opening on the right side, and pull it outward to remove it.
- During use of the fridge, **DO NOT** close the door when the flip cover is opened, to avoid damaging the fridge door.

• **END OF LIFE DISPOSAL**

- Recycle unwanted packaging materials. When this product is no longer required, or has reached the end of its useful life, please dispose of it in an environmentally friendly way. Drain any fluids (if applicable) into approved containers and in accordance with local waste regulations.
- Check local regulations for appropriate waste disposal instructions.

• **CHANGING THE LAMP**

- The refrigerator uses an **LED** lamp for internal lighting, offering low energy consumption and a long service life. If any issues arise, please contact an authorised Baridi stockist or a qualified electrician for service. For safety reasons, **LED** lamp replacement must only be carried out by someone who is electrically qualified or authorised to perform such repairs.

• **TROUBLESHOOTING**

Fault	Checks	Solutions
No operation	Is power switched off Are breakers and fuses tripped or blown No electricity power cut	Switch on Open the door and checking whether the lamp is lit.
Abnormal noise	Is fridge stable. Does fridge touch the wall.	Adjusting fridge's adjustable feet. Pull away from wall.
Poor refrigerating efficiency	Hot food or overloading. Door closing. Is the fridge in direct sunlight or close to central heating. Is the fridge well ventilated. Check temperature settings	Allow food to cool and DO NOT overload compartments. Check the door closing times and seal. Move appliance to a cooler area. Clear vents to maintain good ventilation. Set the appropriate temperature.
Peculiar smell in fridge	Spoiled food. Fridge requires cleaning.	Remove offending articles. Clean fridge.

Environment Protection and Waste Protection and Electrical Equipment Regulations (WEEE)

Recycle unwanted packaging materials. When this product is no longer required, or has reached the end of its useful life, please dispose of it in an environmentally friendly way. Drain any fluids (if applicable) into approved containers, in accordance with local waste regulations. It is our policy to continually improve products and we reserve the right to alter data, specifications and parts without prior notice. No liability is accepted for incorrect use of this product. Guarantee is 12 months from purchase date, proof of which is required for any claim.



REGISTER YOUR PURCHASE HERE

Jack Sealey Ltd t/a Baridi, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK

Jack Sealey (EU) Ltd t/a Baridi, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland

Tel: 01284 757575 • Email: support@baridi.co.uk • Web: www.baridi.co.uk